


Item #				

Project_

Model # CAPO-603 (603-6 AND 603-7 CONFIGURATIONS)
Product Name: Full Size Combination Oven

Up To 6 Full Size Sheet Pan Capacity

Line Ehef™ Full Size Combination Oven w/ Stand

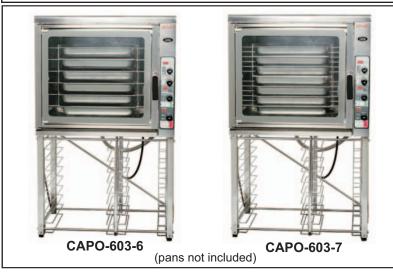

Models CAPO-603-6 and CAPO-603-7 Countertop combination ovens provide steam & convection: roast, bake, cook & hold or any combination

Specifications:

Full Size Combination Oven. 7.0 cubic feet cooking chamber.Steam/convection: roast, bake, cook & hold or any combination. Digital controls for easy operation. Programmable. Probe. Variable steam Venturi drying system. 10 hour timer or continuous on. All stainless double wall insulated construction. **Stand included. 208-240 volts** - Single phase /10,000 watts / 50 amps / NEMA 6-50 Plug / 8' cord

CAPO-603-6: 6 shelves; capacity for 6 **full size** sheet pans or steam pans.

CAPO-603-7: capacity for 7 **full size** steam pans or up to 6* **half size** sheet pans (*3 #GR1055AO shelves included)







NEMA 6-50 Plug

NOTE: THIS MODEL COMES IN TWO DIFFERENT CONFIGURATIONS. They are identical except for the side racks that support shelves or pans, the number of shelves included, and the number/size of pans each model will accomodate.

SPECIFY THE DESIRED MODEL WHEN ORDERING:

MODEL CAPO-603-6: ● Six shelves included

Handles 6 full size steam pans* or 6 full size sheet pans

(pans not included)

MODEL CAPO-603-7: (designed for maximizing steam pan capacity) ● Handles up to 7 full size steam pans* or up to 6 half size sheet pans** (pans not included) ● Three #GR1055AO shelves included (**Six #GR1055AO shelves needed to use 6 half size sheet pans in this model)

* steam pan quantity based on 2-1/2" deep steam pans).

Standard Features- Both Models

- Steam & convection: roast, bake, cook & hold or any combination
- 7.0 cu. ft. cooking chamber (22" H x 27-1/2" W x 20" D)
- Pan spacing: CAPO-603-6 = 3"; CAPO 603-7 = 2-3/4"
- Compact design maximizes available space
- Oven Stand included, 7 double tiers (adjustable width)
- Digital controls provide easy operation
- Programmable (Memory for 70 programs)
- ◆ Variable steam
 ◆ Venturi drying system
- Heat settings from 175° 500° F
- Even heat system
 Two fans
 Probe
- 10 hour timer or continuous on
- Cool-touch, easy-clean safety door
- Insulated double wall construction
- All stainless exterior; easy to clean
- Water feed, drain lines, filter and pressure regulator not included with product
- Water filter required Call Cadco for current filter model

- Full one year on-site warranty covering parts and labor <u>plus</u> two-year warranty on heating element;
 90 day warranty on light bulbs & gasket
- Complete internet or phone technical support for installation of water, electricity, drainage, controls and general start-up
- After-market support system to insure that units are properly serviced.
- Chef Support on-line and via phone
- 208/240 volts /10,000watts/50 amps/single phase/ NEMA 6-50 plug/ 8' cord
- NSF, UL (through CSA standards)
- Unit must ship by truck, NOT UPS
- Freight class 85

OPTIONAL ACCESSORIES:

WPR-2B: Water Pressure Regulator 2 BAR GR1090AO: Shelf for CAPO-603-6; GR1055AO: Shelf for CAPO-603-7 LSR-603-7: Lateral Side Rack/Shelf Supports for CAPO-603-7 (set) (can use on CAPO-603-6 to hold 7 steam pans)

Model	Color	Volts Electrical Watts Amps		Unit Dimensions	Ship Wt./lbs.	Carton Dimensions**	UPC#	
CAPO-603-6		208-240	10,000	50	w:37", h:60", I:343/4"	262*	w:401/4", h:331/2", I:37"**	654796-51675-9
CAPO-603-7	Stainless	208-240	10,000	50	w:37", h:60", l:343/4"	262*	w:401/4", h:331/2", I:37"**	654796-51775-6


*does not include weight of shipping skid **& Stand ctn: w: 381/4" x h:105/8" x l: 241/4"


For more information, please contact Cadco, Ltd, 145 Colebrook River Road, Winsted, CT 06098 Tel. (860)738-2500 ♦ Fax (860) 738-9772 ♦ E-mail: info@cadco-ltd.com ♦ Web site: www.cadco-ltd.com


Item # _____

Project

Model # CAPO-603 (603-6 AND 603-7 CONFIGURATIONS)
Product Name: Full Size Combination Oven
Up To 6 Full Size Sheet Pan Capacity

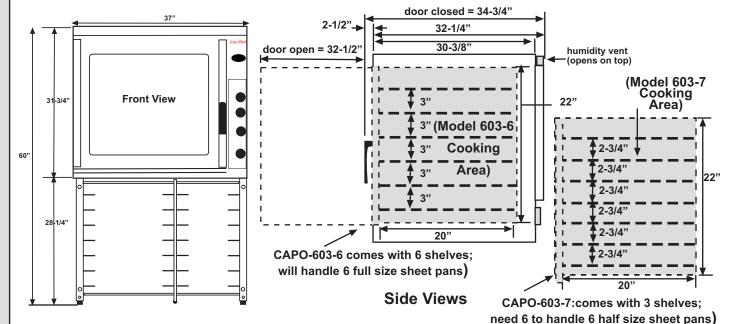

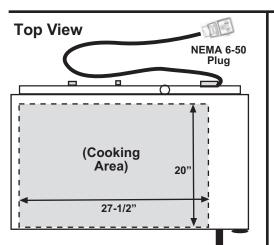

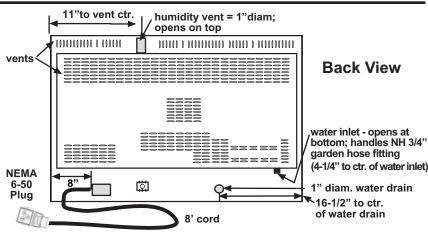




Steam: Water is injected directly into the baking chamber, vaporized and changed into steam when touching the hot heating element. Water should be connected to the oven water inlet by a mechanical filter

and a cut-off valve. Water must have a hardness between 0.5° - 5° F in order to reduce formation of limestone deposits inside the electro-valve and inside the cooking chamber, and a pressure value between 0.5 - 2 bar (7.25 - 29 PSI.)



Cross corner
air flow - High speed,
automatic oscillating
reversible fan for even
cavity heating.



Venturi system - pulls in cool air and pushes out damp air, creating a dry environment.



- CAPO-603 is made to Cadco Ltd. specifications by UNOX S.p.A.
- NSF, UL through CSA Standards (Cadco Model CAPO-603 = UNOX Model XAV603)



- CSA File No. 202281-0-000 (UNOX) / covers Classes 2831-83 (US) and 2831-03 (Canada)
- NSF Listed (UNOX) to ANSI/NSF Standard 4

Combustible Wall Clearance Required:

Sides: 2"

Rear: 4" from back

Top: 3"